

## Needle valve

[BOOK INDEX](#)
[SECTION INDEX](#)


with PTFE packing

BSP female thread to ISO 228

BSP parallel and NPT female threads

temperature -20°C to +200°C

**Note:** Adjust the PTFE packing before initial operation

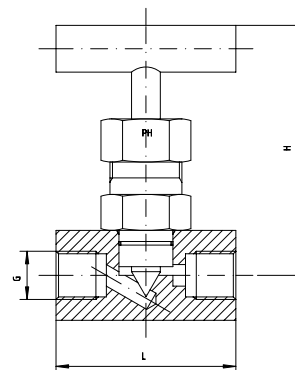

Pressure PN	Thread G	Approx. Dimensions		Part code
		H	L	
420	1/8" zyl	66.0	59.0	NV-G 1/8" -BSP
420	1/4" zyl	66.0	59.0	NV-G 1/4" -BSP
420	3/8" zyl	66.0	59.0	NV-G 3/8" -BSP
420	1/2" zyl	66.0	65.0	NV-G 1/2" -BSP
420	3/4" zyl	94.5	70.0	NV-G 3/4" -BSP
420	1" zyl	94.5	80.0	NV-G 1" -BSP

Pressure PN	Thread G	Approx. Dimensions		Part code
		H	L	
420	1/8" NPT	66.0	59.0	NV-1/8"-NPT
420	1/4" NPT	66.0	59.0	NV-1/4"-NPT
420	3/8" NPT	66.0	59.0	NV-3/8"-NPT
420	1/2" NPT	66.0	65.0	NV-1/2"-NPT
420	3/4" NPT	94.5	70.0	NV-3/4"-NPT
420	1" NPT	94.5	80.0	NV-1"-NPT