

Interlock series, for high pressures.

DIN 2353 metric compression swivel female


L series - swept 45°

ISO 8434-1 / DIN 2353

Specifically designed for use with ferrules

P4, P6 or P7 - pp. 3.02 to 3.04.

Hoses must be skived internally and externally.

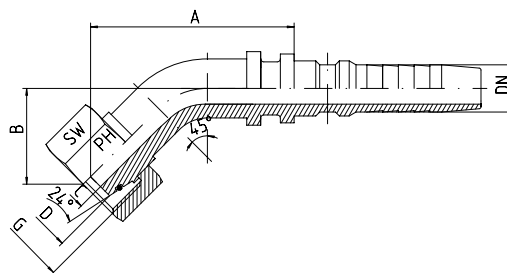

3

Hose DN	Bore in.	Thread G	Tube O.D. D	Approx. Dimensions				Part code
				A	B	C	SW	
19	3/4"	M 30 x 2	22	95	45	14.5	36	I-DKOL-22-45°-DN 19
25	1"	M 36 x 2	28	102	50	20.0	41	I-DKOL-28-45°-DN 25
31	1 1/4"	M 45 x 2	35	120	50	25.0	50	I-DKOL-35-45°-DN 31
38	1 1/2"	M 52 x 2	42	140	61	31.0	60	I-DKOL-42-45°-DN 38