

Interlock series, for high pressures.

DIN 2353 metric compression swivel female


S series - straight

ISO 8434-1 / DIN 2353

Specifically designed for use with ferrules

P4, P6 or P7 - pp. 3.02 to 3.04.

Hoses must be skived internally and externally.

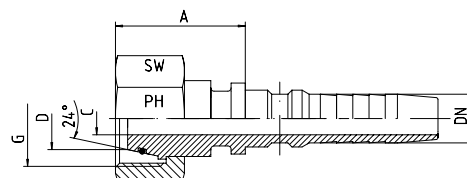

3

Hose DN	Bore in.	Thread G	Tube O.D. D	Approx. Dimensions			Part code		
				A	C	SW			
19	3/4"	M 30 x 2	20	34.5	14.5	36		I-DKOS-20-DN 19	
19	3/4"	M 36 x 2	25	41.0	14.5	46		I-DKOS-25-DN 19	
25	1"	M 36 x 2	25	38.5	20.0	46		I-DKOS-25-DN 25	
25	1"	M 42 x 2	30	43.5	20.0	50		I-DKOS-30-DN 25	
31	1 1/4"	M 42 x 2	30	43.0	23.0	50		I-DKOS-30-DN 31	
31	1 1/4"	M 52 x 2	38	48.5	25.0	60		I-DKOS-38-DN 31	
38	1 1/2"	M 52 x 2	38	41.0	28.0	60		I-DKOS-38-DN 38	
38	1 1/2"	M 68 x 2	50	51.5	31.5	80		I-DKOS-50-DN 38	