

Interlock series, for high pressures.

DIN 2353 metric compression swivel female


S series - swept 90°

ISO 8434-1 / DIN 2353

Specifically designed for use with ferrules

P4, P6 or P7 - pp. 3.02 to 3.04.

Hoses must be skived internally and externally.

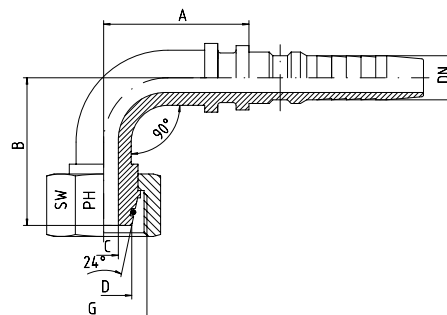

3

Hose DN	Bore in.	Thread G	Tube O.D. D	Approx. Dimensions				Part code	
				A	B	C	SW		
19	3/4"	M 30 x 2	20	78.5	83.0	14.5	36	I-DKOS-20-90°-DN 19	
19	3/4"	M 36 x 2	25	75.0	76.0	14.5	46	I-DKOS-25-90°-DN 19	
25	1"	M 36 x 2	25	84.0	95.5	20.0	46	I-DKOS-25-90°-DN 25	
25	1"	M 42 x 2	30	84.0	83.0	20.0	50	I-DKOS-30-90°-DN 25	
31	1 1/4"	M 52 x 2	38	103.0	101.0	25.0	60	I-DKOS-38-90°-DN 31	
38	1 1/2"	M 68 x 2	50	125.0	111.0	31.0	80	I-DKOS-50-90°-DN 38	