

BSPP 60° Swivel Female (with O-ring) Interlock Insert

[BOOK INDEX](#)
[SECTION INDEX](#)


Interlock series, for high pressures.

BSPP O-ring 60° coned swivel female - swept 90°

Specifically designed for use with ferrules

P4, P6 or P7 - pp. 3.02 to 3.04.

Hoses must be skived internally and externally.

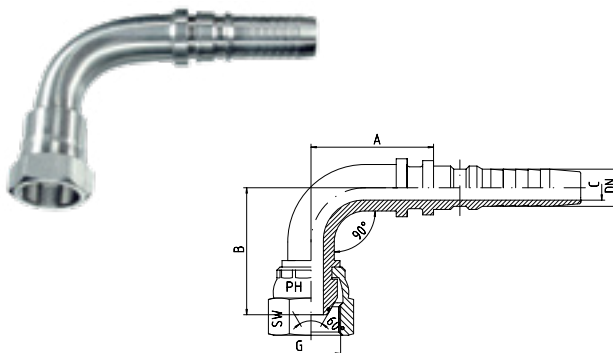

Hose DN	Bore in.	Thread G	Approx. Dimensions				Part code
			A	B	C	SW	
19	3/4"	3/4"-14	77	75	14.5	32	I-DKOR-3/4"-90°-DN 19
25	1"	1"-11	83	85	20.0	41	I-DKOR-1"-90°-DN 25
31	1 1/4"	1 1/4"-11	103	100	25.0	50	I-DKOR-1 1/4"-90°-DN 31
38	1 1/2"	1 1/2"-11	118	110	31.0	60	I-DKOR-1 1/2"-90°-DN 38
51	2"	2"-11	146	152	41.0	70	I-DKOR-2"-90°-DN 51