


BSP swivel female to NPT male

[BOOK INDEX](#)
[SECTION INDEX](#)

**BSP parallel 60° coned swivel
female to NPT 60° coned male**

ISO 8434-6 / BS 5200

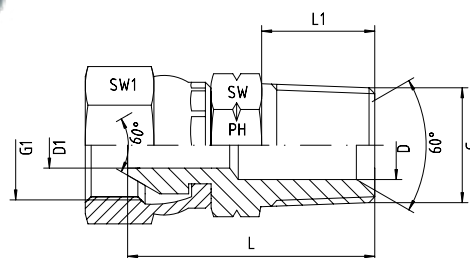

5

Pressure PN	Thread		Approx. Dimensions						Part code BSP x NPT
	G1 = BSP	G = NPT	L	L1	D	D1	SW	SW1	
400	1/8" -28	1/8" -27	25.0	10.0	4.0	4.0	12	14	2280511-02-02
400	1/4" -19	1/4" -18	32.0	15.0	7.0	5.0	14	19	2280511-04-04
400	1/4" -19	3/8" -18	32.0	15.3	10.3	5.0	19	19	2280511-04-06
400	3/8" -19	1/4" -18	33.6	15.0	7.0	7.0	17	22	2280511-06-04
400	3/8" -19	3/8" -18	33.0	15.3	10.0	8.0	19	22	2280511-06-06
400	3/8" -19	1/2" -14	40.8	20.0	13.5	8.0	22	22	2280511-06-08
400	1/2" -14	3/8" -18	34.8	15.3	10.3	9.5	19	27	2280511-08-06
400	1/2" -14	1/2" -14	42.0	20.0	13.5	9.5	22	27	2280511-08-08
400	1/2" -14	3/4" -14	41.0	20.0	16.5	9.5	27	27	2280511-08-12
400	3/4" -14	1/2" -14	43.0	20.0	13.5	16.5	27	32	2280511-12-08
400	3/4" -14	3/4" -14	43.0	20.0	16.5	16.5	27	32	2280511-12-12
400	3/4" -14	1" -11.5	48.5	25.0	24.0	16.5	36	32	2280511-12-16
400	1" -11	1" -11	49.5	25.0	24.0	21.0	36	41	2280511-16-16
200	1 1/4" -11	1 1/4" -11.5	53.0	25.5	28.0	28.0	46	50	2280511-20-20
200	1 1/2" -11	1 1/2" -11.5	57.0	26.0	32.5	32.5	50	55	2280511-24-24
100	2" -11	2" -11.5	69.0	26.0	42.0	42.0	65	70	2280511-32-32