

## BSP male - swivel female 45° elbow


[BOOK INDEX](#)
[SECTION INDEX](#)

**BSP parallel 60° coned male  
to BSP parallel 60° coned  
swivel female 45° elbow**

Short-radius / "block"

ISO 8434-6 / BS 5200

**Please note** - the male threads  
do not have a form B sealing  
shoulder or any shoulder to  
accept a bonded seal!

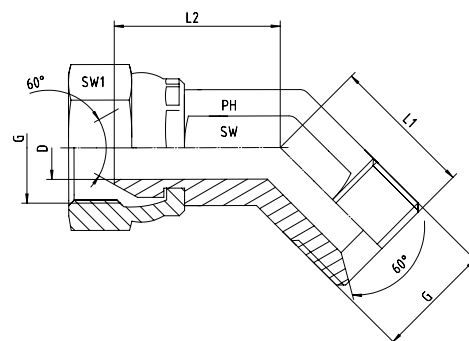

5

| Pressure<br>PN | Thread<br>G | Approx. Dimensions |      |      |    |     | Part code  |  |
|----------------|-------------|--------------------|------|------|----|-----|------------|--|
|                |             | L1                 | L2   | D    | SW | SW1 |            |  |
| 400            | 1/8"-28     | 14.0               | 15.0 | 3.5  | 12 | 14  | 1545510-02 |  |
| 400            | 1/4"-19     | 21.0               | 19.0 | 5.0  | 14 | 19  | 1545510-04 |  |
| 400            | 3/8"-19     | 21.5               | 20.5 | 8.0  | 16 | 22  | 1545510-06 |  |
| 400            | 1/2"-14     | 23.5               | 22.5 | 11.0 | 22 | 27  | 1545510-08 |  |
| 400            | 3/4"-14     | 31.0               | 25.0 | 17.0 | 27 | 32  | 1545510-12 |  |
| 400            | 1"-11       | 36.5               | 27.0 | 22.0 | 33 | 41  | 1545510-16 |  |
| 200            | 1 1/4"-11   |                    |      |      |    |     | 1545510-20 |  |
| 200            | 1 1/2"-11   |                    |      |      |    |     | 1545510-24 |  |
| 100            | 2"-11       | 56.4               | 59.0 | 42.0 | 65 | 70  | 1545510-32 |  |