
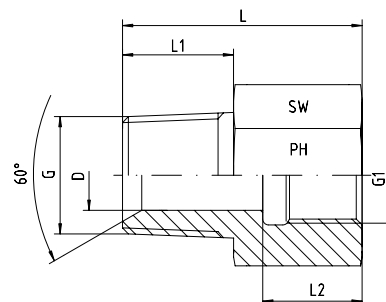


NPT male to BSPP fixed female

[BOOK INDEX](#)
[SECTION INDEX](#)

**NPT male to BSP
parallel fixed female.**

Type - "Form B".



5

Pressure PN	Thread		Approx. Dimensions					Form	Part code		
	G = NPT	G1 = BSP	L	L1	L2	D	SW				
400	1/8"-27	1/8"-28	25.0	10.0	12.0	4.0	14	B		1050517-02-02	
400	1/8"-27	1/4"-19	30.0	10.0	17.0	4.0	19	B		1050517-02-04	
400	1/4"-18	1/8"-28	30.0	15.0	12.0	6.0	14	B		1050517-04-02	
400	1/4"-18	1/4"-19	34.0	15.0	17.0	6.0	19	B		1050517-04-04	
400	1/4"-18	3/8"-19	35.0	15.0	17.0	6.0	24	B		1050517-04-06	
400	1/4"-18	1/2"-14	36.5	15.0	20.0	5.0	27	B		1050517-04-08	
400	3/8"-18	1/4"-19	35.0	15.0	17.0	9.0	19	B		1050517-06-04	
400	3/8"-18	3/8"-19	35.0	15.0	17.0	9.0	24	B		1050517-06-06	
400	3/8"-18	1/2"-14	37.0	15.0	20.0	9.0	27	B		1050517-06-08	
400	1/2"-14	3/8"-19	38.0	20.0	17.0	12.0	24	B		1050517-08-06	
400	1/2"-14	1/2"-14	41.0	20.0	20.0	12.0	27	B		1050517-08-08	
400	1/2"-14	3/4"-14	48.0	20.0	22.5	12.0	32	B		1050517-08-12	
400	3/4"-14	1/2"-14	42.0	20.0	20.0	15.0	27	B		1050517-12-08	
400	3/4"-14	3/4"-14	48.0	20.0	22.5	18.0	32	B		1050517-12-12	
400	3/4"-14	1"-11	50.0	20.0	25.0	18.0	41	B		1050517-12-16	
400	1"-11.5	3/4"-14	54.0	25.0	22.5	21.0	36	B		1050517-16-12	
400	1"-11.5	1"-11	57.0	25.0	25.0	21.0	41	B		1050517-16-16	
200	1"-11.5	1 1/4"-11	57.0	25.0	27.0	21.0	55	B		1050517-16-20	
200	1 1/4"-11.5	1 1/4"-11	57.5	25.5	27.0	30.0	55	B		1050517-20-20	
200	1 1/4"-11.5	1 1/2"-11	62.5	25.5	27.5	30.0	55	B		1050517-20-24	
200	1 1/2"-11.5	1 1/4"-11	56.0	26.0	27.0	36.0	55	B		1050517-24-20	
200	1 1/2"-11.5	1 1/2"-11	63.0	26.0	27.5	36.0	55	B		1050517-24-24	
100	1 1/2"-11.5	2"-11	64.0	26.0	30.5	36.0	70	B		1050517-24-32	
100	2"-11.5	2"-11	64.0	26.0	30.5	46.0	70	B		1050517-32-32	