

Male stud coupling to UNF


[BOOK INDEX](#)
[SECTION INDEX](#)

to ISO 8434-1 / DIN 2353

S series

UNF thread to ASA B 1.1-1960 / J514

Note - correct port dimensions must be created.

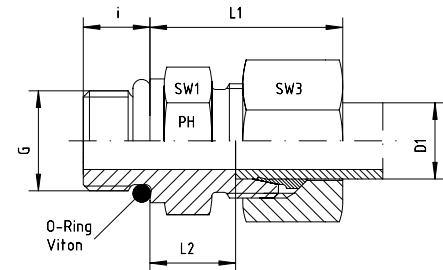

Series	Pressure PN	Tube O.D. D1	Thread G	Approx. Dimensions					O-ring	Part code
				L1	L2	i	SW1	SW3		
S	630	6	7/16"-20 UNF	28.0	13.0	9.2	17	17	8.92 x 1.83	GE-S-06-7/16"-UNF
S	630	6	9/16"-18 UNF	29.0	13.0	10.0	19	17	11.90 x 1.98	GE-S-06-9/16"-UNF
S	630	8	7/16"-20 UNF	30.0	15.0	9.2	17	19	8.92 x 1.83	GE-S-08-7/16"-UNF
S	630	8	1/2"-20 UNF	30.0	15.0	9.2	17	19	10.52 x 1.83	GE-S-08-1/2"-UNF
S	630	8	9/16"-18 UNF	30.0	13.0	10.0	19	19	11.90 x 1.98	GE-S-08-9/16"-UNF
S	630	10	9/16"-18 UNF	31.0	15.5	10.0	19	22	11.90 x 1.98	GE-S-10-9/16"-UNF
S	630	10	3/4"-16 UNF	31.0	15.0	11.2	24	22	16.36 x 2.20	GE-S-10-3/4"-UNF
S	630	12	9/16"-18 UNF		14.5	10.0	22	24	11.90 x 1.98	GE-S-12-9/16"-UNF
S	630	12	3/4"-16 UNF	33.5	17.5	11.2	24	24	16.36 x 2.20	GE-S-12-3/4"-UNF
S	630	12	7/8"-14 UNF	32.5	14.8	12.7	27	24	19.18 x 2.46	GE-S-12-7/8"-UNF
S	630	14	9/16"-18 UNF	37.0	19.0	10.0	24	27	11.90 x 1.98	GE-S-14-9/16"-UNF
S	630	14	3/4"-16 UNF	37.0	19.0	11.2	24	27	16.36 x 2.20	GE-S-14-3/4"-UNF
S	400	16	3/4"-16 UNF	37.0	18.5	11.2	27	30	16.36 x 2.20	GE-S-16-3/4"-UNF
S	400	16	7/8"-14 UNF	33.5	15.5	14.0	30	30	19.18 x 2.46	GE-S-16-7/8"-UNF
S	400	16	1 1/16"-12 UNF	37.0	18.5	15.0	32	30	23.47 x 2.95	GE-S-16-1 1/16"-UNF
S	400	20	3/4"-16 UNF	42.0	20.5	11.2	32	36	16.36 x 2.20	GE-S-20-3/4"-UNF
S	400	20	7/8"-14 UNF	42.0	20.5	12.7	32	36	19.18 x 2.46	GE-S-20-7/8"-UNF
S	400	20	1 1/16"-12 UNF	42.0	20.5	15.0	32	36	23.47 x 2.95	GE-S-20-1 1/16"-UNF
S	400	20	1 5/16"-12 UNF		22.5	15.0	41	36	29.74 x 2.95	GE-S-20-1 5/16"-UNF
S	400	25	1 1/16"-12 UNF	47.0	23.0	15.0	41	46	23.47 x 2.95	GE-S-25-1 1/16"-UNF
S	400	25	1 5/16"-12 UNF	47.0	23.0	15.0	41	46	29.74 x 2.95	GE-S-25-1 5/16"-UNF
S	400	30	1 1/16"-12 UNF	50.0	23.5	15.0	46	50	23.47 x 2.95	GE-S-30-1 1/16"-UNF
S	400	30	1 5/16"-12 UNF	50.0	23.5	15.0	46	50	29.74 x 2.95	GE-S-30-1 5/16"-UNF
S	400	30	1 5/8"-12 UNF	50.0	23.5	15.0	50	50	37.46 x 3.00	GE-S-30-1 5/8"-UNF
S	315	38	1 5/8"-12 UNF	57.0	26.0	15.0	55	60	37.46 x 3.00	GE-S-38-1 5/8"-UNF
S	315	38	1 7/8"-12 UNF	57.0	26.0	15.0	55	60	43.69 x 3.00	GE-S-38-1 7/8"-UNF

Fittings can be supplied with nuts with silver-plated threads to help to prevent galling, or can be supplied body only - no nut or cutting ring.

If you require silver-plated nuts, use suffix -SC. If you require body only, use suffix -OMD.

Eg. GE-S-12-3/4"-UNF-SC, or GE-S-12-3/4"-UNF-OMD.