


Male stud run tee to metric parallel

[BOOK INDEX](#)
[SECTION INDEX](#)

to ISO 8434-1 / DIN 2353

L and S series

Form B sealing shoulder

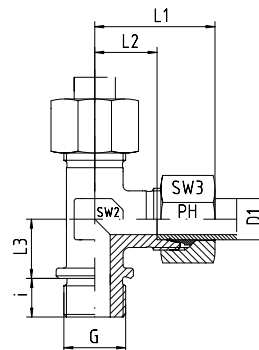

Series	Pressure PN	Tube O.D. D1	Thread G	Approx. Dimensions						Part code
				L1	L2	L3	i	SW2	SW3	
L	160	22	M 26 x 1.5 zyl	44	27.5	26	16	27	36	LE-L-22-M 26x1.5-z
L	160	28	M 33 x 2 zyl	47	30.5	30	18	36	41	LE-L-28-M 33x2-z
L	160	35	M 42 x 2 zyl	56	34.5	34	20	41	50	LE-L-35-M 42x2-z
L	160	42	M 48 x 2 zyl	63	40.0	39	22	50	60	LE-L-42-M 48x2-z

Series	Pressure PN	Tube O.D. D1	Thread G	Approx. Dimensions						Part code
				L1	L2	L3	i	SW2	SW3	
S	400	20	M 27 x 2 zyl	48	26.5	26	16	27	36	LE-S-20-M 27x2-z
S	250	25	M 33 x 2 zyl	54	30.0	30	18	36	46	LE-S-25-M 33x2-z
S	160	30	M 42 x 2 zyl	62	35.5	34	20	41	50	LE-S-30-M 42x2-z
S	160	38	M 48 x 2 zyl	72	41.0	39	22	50	60	LE-S-38-M 48x2-z

Fittings can be supplied with nuts with silver-plated threads to help to prevent galling, or can be supplied body only - no nut or cutting ring.

If you require silver-plated nuts, use suffix -SC. If you require body only, use suffix -OMD.

Eg. LE-L-22-M 26x1.5-z-SC, or LE-L-22-M 26x1.5-z-OMD