


to ISO 8434-1 / DIN 2353

L and S series

Supplied complete with
stainless internal sealing
ring

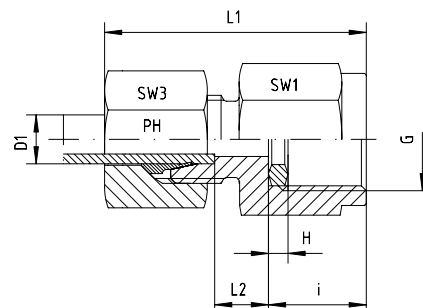

Series	Pressure PN	Tube O.D. D1	Thread G	Approx. Dimensions						Part code	
				L1	L2	i	H	SW1	SW3		
L	315	6	G 1/4"	37.0	7.5	14.5	4.5	19	14	MV-L-06-G 1/4"	
L	315	6	G 1/2"	46.0	9.0	20.0	5.0	27	14	MV-L-06-G 1/2"	
L	315	8	G 1/4"	37.0	7.5	14.5	4.5	19	17	MV-L-08-G 1/4"	
L	315	8	G 1/2"	46.0	9.0	20.0	5.0	27	17	MV-L-08-G 1/2"	
L	315	10	G 1/4"	38.0	8.5	14.5	4.5	19	19	MV-L-10-G 1/4"	
L	315	10	G 1/2"	47.0	9.5	20.0	5.0	27	19	MV-L-10-G 1/2"	
L	315	12	G 1/4"	38.0	8.5	14.5	4.5	19	22	MV-L-12-G 1/4"	
L	315	12	G 1/2"	48.0	10.0	20.0	5.0	27	22	MV-L-12-G 1/2"	

Series	Pressure PN	Tube O.D. D1	Thread G	Approx. Dimensions						Part code	
				L1	L2	i	H	SW1	SW3		
S	630	6	G 1/2"	46.0	11.0	20.0	5.0	27	17	MV-S-06-G 1/2"	
S	630	8	G 1/4"	40.0	9.5	14.5	4.5	19	19	MV-S-08-G 1/4"	
S	630	8	G 1/2"	46.0	11.0	20.0	5.0	27	19	MV-S-08-G 1/2"	
S	630	10	G 1/4"	40.5	9.0	14.5	4.5	19	22	MV-S-10-G 1/4"	
S	630	10	G 1/2"	47.0	10.5	20.0	5.0	27	22	MV-S-10-G 1/2"	
S	630	12	G 1/4"	41.0	8.0	14.5	4.5	22	24	MV-S-12-G 1/4"	
S	630	12	G 1/2"	47.0	10.5	20.0	5.0	27	24	MV-S-12-G 1/2"	

Fittings can be supplied with nuts with silver-plated threads to help to prevent galling, or can be supplied body only - no nut or cutting ring.

If you require silver-plated nuts, use suffix -SC. If you require body only, use suffix -OMD.

Eg. MV-L-12-G 1/2"-SC, or MV-L-12-G 1/2"-OMD