

Adjustable BSP parallel female pressure gauge connector


[BOOK INDEX](#)
[SECTION INDEX](#)

to ISO 8434-1 / DIN 2353

L and S series

Supplied complete with
stainless internal sealing ring.

Note - when assembling, a
further 1/2 turn is required
when the torque increase is felt.

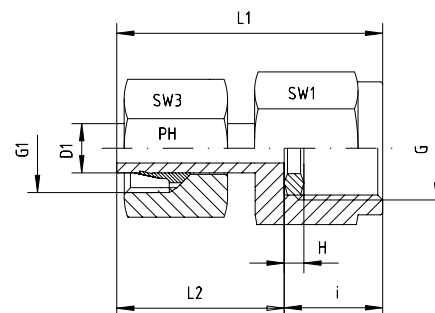

Series	Pressure PN	Tube O.D. D1	Thread		Approx. Dimensions						Part code	
			G	G1	L1	L2	i	H	SW1	SW3		
L	315	6	G 1/4"	M 12 x 1.5	38.0		14.5	4.5	19	14	MV-ev-L-06-G 1/4"	
L	315	6	G 1/2"	M 12 x 1.5	45.0		20.0	5.0	27	14	MV-ev-L-06-G 1/2"	
L	315	8	G 1/4"	M 14 x 1.5	38.0		14.5	4.5	19	17	MV-ev-L-08-G 1/4"	
L	315	8	G 1/2"	M 14 x 1.5	47.6		20.0	5.0	27	17	MV-ev-L-08-G 1/2"	
L	315	10	G 1/4"	M 16 x 1.5	39.5		14.5	4.5	19	19	MV-ev-L-10-G 1/4"	
L	315	10	G 1/2"	M 16 x 1.5	47.0		20.0	5.0	27	19	MV-ev-L-10-G 1/2"	
L	315	12	G 1/4"	M 18 x 1.5	40.5		14.5	4.5	19	22	MV-ev-L-12-G 1/4"	
L	315	12	G 1/2"	M 18 x 1.5	47.5		20.0	5.0	27	22	MV-ev-L-12-G 1/2"	

Series	Pressure PN	Tube O.D. D1	Thread		Approx. Dimensions						Part code	
			G	G1	L1	L2	i	H	SW1	SW3		
S	630	6	G 1/4"	M 14 x 1.5	38.0		14.5	4.5	19	17	MV-ev-S-06-G 1/4"	
S	630	6	G 1/2"	M 14 x 1.5	45.0		20.0	5.0	27	17	MV-ev-S-06-G 1/2"	
S	630	8	G 1/4"	M 16 x 1.5	38.0		14.5	4.5	19	19	MV-ev-S-08-G 1/4"	
S	630	8	G 1/2"	M 16 x 1.5	47.6		20.0	5.0	27	19	MV-ev-S-08-G 1/2"	
S	630	10	G 1/4"	M 18 x 1.5	39.5		14.5	4.5	19	22	MV-ev-S-10-G 1/4"	
S	630	10	G 1/2"	M 18 x 1.5	47.0		20.0	5.0	27	22	MV-ev-S-10-G 1/2"	
S	630	12	G 1/4"	M 20 x 1.5	40.5		14.5	4.5	19	24	MV-ev-S-12-G 1/4"	
S	630	12	G 1/2"	M 20 x 1.5	47.5		20.0	5.0	27	24	MV-ev-S-12-G 1/2"	

Fittings can be supplied with nuts with silver-plated threads to help to prevent galling, or can be supplied body only - no nut or cutting ring.

If you require silver-plated nuts, use suffix -SC. If you require body only, use suffix -OMD.

Eg. MV-ev-L-12-G 1/2"-SC, or MV-ev-L-12-G 1/2"-OMD