


BSP male male

[BOOK INDEX](#)
[SECTION INDEX](#)

BSP parallel 60° coned male male

Form B sealing shoulder

ISO 8434-6 / BS 5200

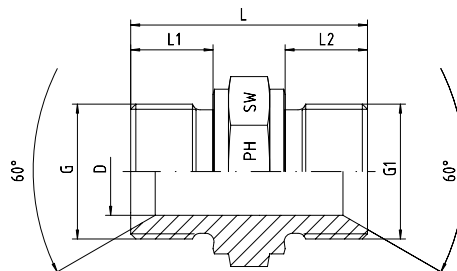

Pressure PN	Thread		Approx. Dimensions					Part code		
	G = BSP	G1 = BSP	L	L1	L2	D	SW			
400	1/8"-28	1/8"-28	23.0	8	8	4.5	14		1050510-02-02	
400	1/4"-19	1/4"-19	29.0	10	10	6.0	19		1050510-04-04	
400	3/8"-19	3/8"-19	35.0	12	12	9.0	22		1050510-06-06	
400	1/2"-14	1/2 "-14	41.0	14	14	13.0	27		1050510-08-08	
400	5/8"-14	5/8"-14	43.5	16	16	14.5	30		1050510-10-10	
400	3/4"-14	3/4"-14	46.0	16	16	18.0	32		1050510-12-12	
400	1 "-11	1 "-11	52.0	18	18	23.5	41		1050510-16-16	
200	1 1/4"-11	1 1/4"-11	58.0	20	20	30.0	50		1050510-20-20	
200	1 1/2 "-11	1 1/2 "-11	61.0	22	22	37.0	55		1050510-24-24	
100	2 "-11	2 "-11	67.0	25	25	45.0	70		1050510-32-32	
70	2 1/2 "-11	2 1/2 "-11	70.0	26	26	51.0	90		1050510-40-40	