



Hexagonal reducing bush – BSP parallel – with captive seal

[BOOK INDEX](#)
[SECTION INDEX](#)

Form A

Both threads BSP parallel
to DIN / ISO 228

Male thread with Viton
elastomeric soft seal

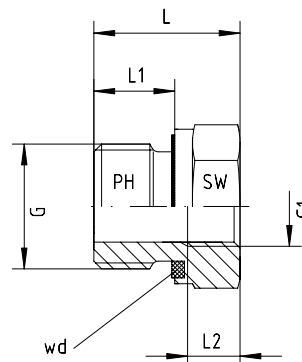

Pressure PN	Male Thread G	Female Thread G1	Approx. Dimensions				Form		Part code
			L	L1	L2	SW			
630	G 3/8"	G 1/8"	22.5	12.0	8.0	22	A		GRI-3/8"-wd x 1/8"
630	G 1/2"	G 1/4"	24.0	14.0	12.0	27	A		GRI-1/2"-wd x 1/4"
630	G 1/2"	G 1/8"	24.0	14.0	8.0	27	A		GRI-1/2"-wd x 1/8"
400	G 3/4"	G 3/8"	26.0	16.0	13.0	32	A		GRI-3/4"-wd x 3/8"
400	G 3/4"	G 1/4"	26.0	16.0	12.0	32	A		GRI-3/4"-wd x 1/4"
400	G 3/4"	G 1/8"	26.0	16.0	8.0	32	A		GRI-3/4"-wd x 1/8"
400	G 1"	G 1/2"	29.0	18.0	14.0	41	A		GRI-1"-wd x 1/2"
400	G 1"	G 3/8"	29.0	18.0	12.0	41	A		GRI-1"-wd x 3/8"
400	G 1"	G 1/4"	29.0	18.0	12.0	41	A		GRI-1"-wd x 1/4"
400	G 1 1/4"	G 3/4"	32.0	20.0	16.0	50	A		GRI-1 1/4"-wd x 3/4"
400	G 1 1/4"	G 1/2"	32.0	20.0	14.0	60	A		GRI-1 1/4"-wd x 1/2"
400	G 1 1/4"	G 3/8"	32.0	20.0	17.0	50	A		GRI-1 1/4"-wd x 3/8"
315	G 1 1/2"	G 1"	36.0	22.0	18.0	55	A		GRI-1 1/2"-wd x 1"
315	G 1 1/2"	G 3/4"	36.0	22.0	16.0	55	A		GRI-1 1/2"-wd x 3/4"
315	G 1 1/2"	G 1/2"	36.0	22.0	14.0	55	A		GRI-1 1/2"-wd x 1/2"
250	G 2"	G 1 1/2"	42.0	22.5	18.5	70	A		GRI-2"-wd x 1 1/2"
250	G 2"	G 1 1/4"	42.0	22.5	18.5	70	A		GRI-2"-wd x 1 1/4"
250	G 2"	G 1"	42.0	22.5	18.5	70	A		GRI-2"-wd x 1"
250	G 2"	G 3/4"	42.0	22.5	16.0	70	A		GRI-2"-wd x 3/4"
250	G 2"	G 1/2"	41.5	22.5	16.0	70	A		GRI-2"-wd x 1/2"