


to ISO 8434-1 / DIN 2353

L and S series

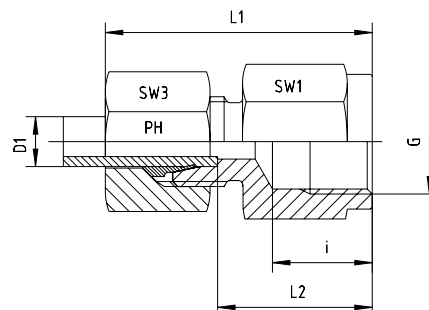

Series	Pressure PN	Tube O.D. D1	Thread G	Approx. Dimensions					Part code	
				L1	L2	i	SW1	SW3		
L	315	6	1/4" NPT	38	23.5	16.4	19	14		MV-L-06-NPT-1/4"
L	315	6	1/2" NPT	46	31.0	22.6	27	14		MV-L-06-NPT-1/2"
L	315	8	1/4" NPT	38	23.5	16.4	19	17		MV-L-08-NPT-1/4"
L	315	8	1/2" NPT	46	31.0	22.6	27	17		MV-L-08-NPT-1/2"
L	315	10	1/4" NPT	39	24.0	16.4	19	19		MV-L-10-NPT-1/4"
L	315	10	1/2" NPT	47	32.0	22.6	27	19		MV-L-10-NPT-1/2"
L	315	12	1/4" NPT			16.4	19	22		MV-L-12-NPT-1/4"
L	315	12	1/2" NPT	47	32.0	22.6	27	22		MV-L-12-NPT-1/2"

Series	Pressure PN	Tube O.D. D1	Thread G	Approx. Dimensions					Part code	
				L1	L2	i	SW1	SW3		
S	630	6	1/2" NPT	48	33.0	22.6	27	17		MV-S-06-NPT-1/2"
S	630	8	1/2" NPT	48	33.0	22.6	27	19		MV-S-08-NPT-1/2"
S	630	10	1/2" NPT	49	32.5	22.6	27	22		MV-S-10-NPT-1/2"
S	630	12	1/2" NPT	49	32.5	22.6	27	24		MV-S-12-NPT-1/2"

Fittings can be supplied with nuts with silver-plated threads to help to prevent galling, or can be supplied body only - no nut or cutting ring.

If you require silver-plated nuts, use suffix -SC. If you require body only, use suffix -OMD.

Eg. MV-L-12-NPT-1/2"-SC, or MV-L-12-NPT-1/2"-SC